

Wabo®Prima Lub Adhesive

One component

Features	Benefits
<ul style="list-style-type: none"> • One Component 	No Premixing required
<ul style="list-style-type: none"> • Versatile 	Can be used as a installation aid with a variety of Watson Bowman Acme rubber seals

DESCRIPTION:


Wabo®Prima Lub Adhesive aids with the installation of many WBA Rubber Seals. Wabo®Prima Lub is a one component moisture curing polyurethane with an aromatic hydrocarbon solvent mixture which complies with ASTM D4070.

RECOMMENDED FOR:

- Aids in installation of WBA's Rubber Seals for the Architectural, Parking and Bridge/Highway Segments.

PACKAGING/COVERAGE:

- Wabo®PrimaLub – 1 gal container
- Wabo®PrimaLub lubricant coverage will depend on joint size, placement, waste, and experience.

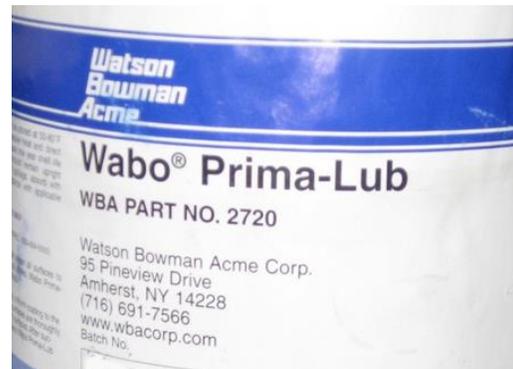

PHYSICAL PROPERTIES:

PHYSICAL PROPERTY	TEST METHOD	REQUIREMENTS
Elongation at Break	ASTM D 638	350% (Min.)
Film Strength	D 412	2000 psi (Min.)
Workable Temperature Range		5° F to 120° F



FOR BEST RESULTS:

- Install when concrete substrate is clean, sound, dry, and cured (14 day minimum). Follow International Concrete Repair Institute (ICRI) concrete repair and maintenance guidelines.
 - Protect the work area with appropriate plastic sheeting. It is always a good idea to utilize plastic sheeting on the underside of the joint opening to protect from objects, dripping liquids, or other materials from falling through the opening to lower levels.
 - Do not allow any of the components to freeze prior to installation. Store all components out of direct sunlight in a clean, dry location between 50°F and 90°F.
 - Shelf life is 1 year.
 - Periodically inspect the applied material and repair localized areas as needed. Consult a Watson Bowman Acme representative for additional information.
 - Make certain the most current version of the product data sheet is being used. Please consult the website (www.wbacorp.com) or contact a customer service representative.
- Proper application is the responsibility of the user. Field visits by Watson Bowman Acme personnel are for the purpose of making technical recommendations only and not for supervising or providing quality control on the jobsite.

INSTALLATION SUMMARY:

- The concrete substrate must be abrasive blasted to remove all latencies and contaminants which may cause bonding problems. Steel substrates must be abrasive blasted to near white metal.
- Brush apply the Prima Lub adhesive on the concrete surfaces or into the Steel StripSeal Shapes using a soft bristled brush. Exercise care not to over apply to these areas because adding too much material could be a hindrance for installation.
- Clean all excess Prima Lub from the edges of the joint opening and from the top of the seal as soon as it is pushed into the desired depth with an appropriate solvent.

RELATED DOCUMENTS:

- Wabo®Prima Lub Adhesive MSDS

LIMITED WARRANTY:

Watson Bowman Acme Corp. warrants that this product conforms to its current applicable specifications. WATSON BOWMAN ACME CORP. MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. The sole and exclusive remedy of Purchaser for any claim concerning this product, including, but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is the replacement of product or refund of the purchase price, at the sole option of Watson Bowman Acme Corp. Any claims concerning this product shall be submitted in writing within one year of the delivery date of this product to Purchaser and any claims not presented within that period are waived by Purchaser. IN NO EVENT SHALL WATSON BOWMAN ACME CORP. BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDES LOSS OF PROFITS) OR PUNITIVE DAMAGES. Other warranties may be available when the product is installed by a factory trained installer. Contact your local Watson Bowman Acme representative for details. The data expressed herein is true and accurate to the best of our knowledge at the time published; it is, however, subject to change without notice.

WaboPrimaLub_1020